

### Product Description:

The FINN Series is a simple, yet effective fixture that can provide upwards of 150 lumens per watt. The FINN is housed in a compact aluminum body that is both lightweight and hosts a modern yet modest aesthetic. The FINN is ideal for parking lots, museums, art galleries, sidewalks, buildings, schools, and residential areas.

### Features:

- **Application:** LED Flood Light
- **Mounting:** Slipfitter, Trunnion, Straight Arm
- **Warranty:** 5 Years
- **Long Life:** 100,000+ Calculated Hrs.
- **LED Source:** Lumileds
- **Driver:** Sosen
- **Operating Temp:** -22°F ~ 122°F



### Technical Data:

<b>Certifications</b>	<b>UL</b>
<b>CRI</b>	<b>≥ 70</b>
<b>IP Rating</b>	<b>IP66</b>
<b>CCT</b>	<b>4000K ~ 5000K</b>
<b>Input Voltage</b>	<b>120-277V</b>



### MOUNTING OPTIONS:



### PHOTOCELL ACCESSORY:




### Specifications:

Fixture Model	Total Lumens (5000K)	Efficacy (lm/w)	Dimensions (inches - no mounting)	Weight (lbs)	Beam Angle
FINN-100W	15,381 lm	153 lm/W	14.62 x 12.75 x 3.26	9.3	120°
FINN-150W	21,929 lm	146 lm/W	14.62 x 12.75 x 3.26	9.3	
FINN-200W	29,769 lm	148 lm/W	14.62 x 12.75 x 3.26	9.3	

## Photometrics:


### FINN-150W/5000K/120°

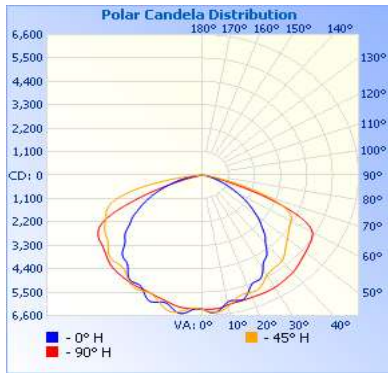

	Center Beam fc	Beam Width	
9.7R	67.0 fc	25.9 ft	47.7 ft
19.3R	16.9 fc	51.6 ft	94.8 ft
29.0R	7.49 fc	77.5 ft	142.5 ft
38.7R	4.21 fc	103.4 ft	190.1 ft
48.3R	2.70 fc	129.1 ft	237.3 ft
58.0R	1.87 fc	155.0 ft	284.9 ft

Vert. Spread: 106.4°  
Horiz. Spread: 135.7°

### FINN-200W/5000K/120°

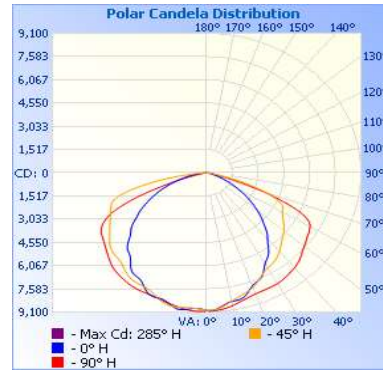


	Center Beam fc	Beam Width	
9.7R	95.6 fc	25.3 ft	48.8 ft
19.3R	24.1 fc	50.3 ft	97.0 ft
29.0R	10.7 fc	75.5 ft	145.8 ft
38.7R	6.00 fc	100.8 ft	194.6 ft
48.3R	3.85 fc	125.8 ft	242.8 ft
58.0R	2.67 fc	151.1 ft	291.6 ft


Vert. Spread: 105.0°  
Horiz. Spread: 136.6°

## Dimensions:




### FINN (No Mounting)

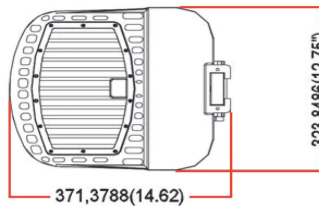

### FINN (Slipfitter)

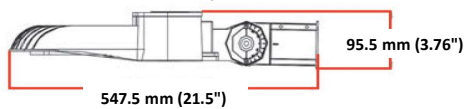

### FINN (Trunnion)

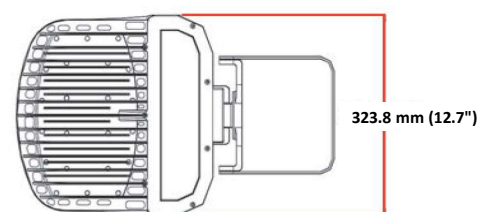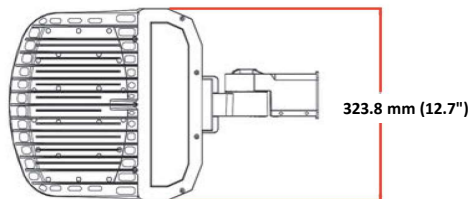

## Ordering Guide:

<b>FINN-150W</b>	<b>120-277V</b>	<b>BR</b>	<b>50K</b>	<b>SL</b>	
<b>Wattage:</b> 100W 150W 200W	<b>Voltage:</b> 120-277V	<b>Color:</b> BR: Bronze (RAL 8040)	<b>CCT:</b> 40K 50K	<b>Mounting:</b> SL: Slipfitter TR: Trunnion SA: Straight Arm	<b>Optional Accessories:</b> PC: Photocell