

### Product Description:

The Bullet Series, available in an array of different optics, is ideal for various outdoor applications such as landscape lighting, buildings lighting, facade lighting, sign lighting, etc. This luminaire is equipped with waterproof and durable high-temperature silicone gaskets and uses a die-cast aluminum housing that features integral cooling fins. Available in RGB and 12V options.



### Features:

- **Application:** Landscape Lighting
- **Warranty:** 5 Years
- **LED Source:** Nichia LED
- **Operating Temperature:** -22°F ~ 122°F
- **Housing Material:** Die-cast aluminum + tempered glass
- **Power Factor:** >0.9

### Technical Data:

<b>Certifications</b>	<b>UL</b>
<b>CRI</b>	<b>≥70</b>
<b>IP Rating</b>	<b>IP65</b>
<b>Color Temp</b>	<b>3000K-5000K</b>
<b>Input Voltage</b>	<b>120-277V</b>



Shroud

### Specifications:


Fixture Model	Total Lumens (3000K/35°)	Efficacy (lm/w)	Dimensions (in)	Weight (lbs)	Beam Angle
BULLET-6W	690 lm	115 lm/W	5.02 x 5.38 x 3.45	1.54 lbs	22° 35° 57°
BULLET-12W	1,467.6 lm	122.3 lm/W			
BULLET-30W	3,821.4 lm	127.3 lm/W	6.91 x 6.25 x 4.66	2.86 lbs	
BULLET 40W	4,649.8 lm	116.2 lm/W			

BULLET-RGB-6W	R: 81 lm / G: 109 lm / B: 22 lm / W: 182 lm	5.02 x 5.38 x 3.45	1.54 lbs	22° 35° 57°
BULLET-RGB-12W	R: 209 lm / G: 218 lm / B: 45 lm / W: 343 lm			
BULLET-RGB-30W	R: 462 lm / G: 524 lm / B: 107 lm / W: 867 lm	6.91 x 6.25 x 4.66	2.86 lbs	


BULLET-LV-6W	660 lm	110 lm/W	5.02 x 5.38 x 3.45	1.54 lbs	22° 35° 57°
BULLET-LV-12W	1,330 lm	110 lm/W			
BULLET-LV-30W	3,184 lm	110 lm/W	6.91 x 6.25 x 4.66	2.86 lbs	
BULLET-LV-40W	4,460 lm	110 lm/W			

## Dimensions:

### **BULLET 6W-12W:**

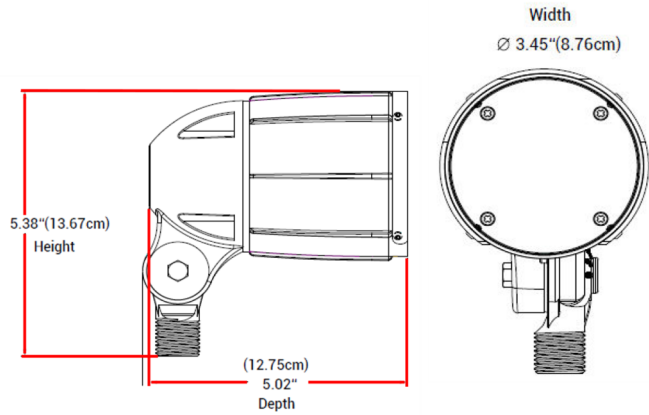


### **BULLET 30W-40W:**

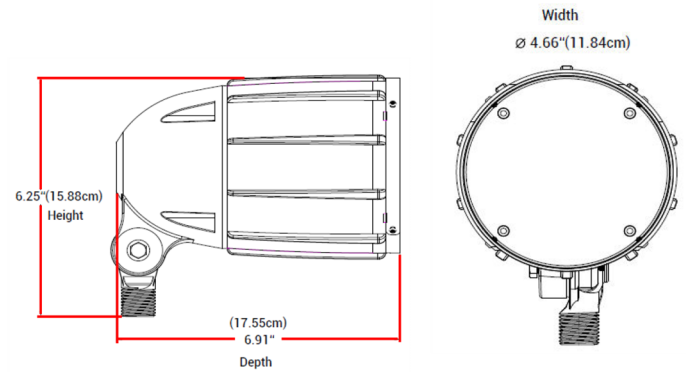

## Photometrics:

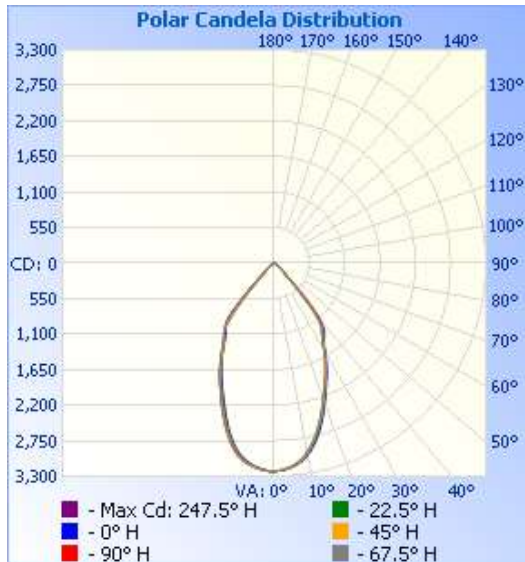

### **BULLET-30W-5K**



	Illuminance at a Distance	
	Center Beam fc	Beam Width
9.7ft	34.2 fc	11.1 ft 11.2 ft
19.3ft	8.64 fc	22.2 ft 22.2 ft
29.0ft	3.83 fc	33.3 ft 33.4 ft
38.7ft	2.15 fc	44.4 ft 44.5 ft
48.3ft	1.38 fc	55.4 ft 55.5 ft
58.0ft	0.96 fc	66.6 ft 66.7 ft

■ Vert. Spread: 59.7°  
■ Horiz. Spread: 59.8°

## Ordering Guide:

BULLET-12W	120-277V	BR	40K	35°	1/2" NPT	
<b>Standard:</b> BULLET-6W BULLET-12W BULLET-30W BULLET-40W	<b>Voltage:</b> <b>Standard:</b> 120-277V	<b>Color:</b> BR: Bronze	<b>CCT:</b> 30K 40K 50K	<b>Beam Angle:</b> 22° 35° 57°	<b>Thread Size:</b> 1/2" NPT	<b>Optional Accessories:</b> SH: Shroud ST: Mounting Stake RC: Remote Control (RGB only)
<b>RGB:</b> BULLET-RGB-6W BULLET-RGB-12W BULLET-RGB-30W	<b>RGB &amp; Low Voltage:</b> AC12/DC12 DC24					 
<b>Low Voltage:</b> BULLET-LV-6W BULLET-LV-12W BULLET-LV-30W BULLET-LV-40W						